

Product datasheet

Flotation Bypass System

Flotation Bypass System is a custom designed system that provides a means of bypassing an individual cell in the flotation cell bank, without the need to shut down the entire line for extended periods of time.

A simple means to minimise downtime

With only a minor modification to your flotation circuit, you can eliminate thousands of hours of unnecessary downtime throughout the year. The ability to maintain high levels of production in this portion of the circuit is one of the most economically strategic steps you can take in your plant.

The bypass system is an uncomplicated operation that works on the same proven principle as a typical gravity-based dart valve system. It does not need to be connected to the plant's main control system.

Tailored to the specific needs of your site, the installation is straightforward and can be completed in 24 hours.

Benefits

- **Reduced shutdown time**
Significantly reduces downtime associated with scheduled maintenance
- **Safety**
Allows maintenance work on isolated cells without the risk of slurry overflowing the cell
- **Automated level control**
Standalone Multi-Sense® level sensor, installed into the upstream cell, signals the pinch valve in the bypass line to control the valve position
- **Modular design**
Modular design allows the system to be moved up or down the flotation bank to bypass all but the first cell

FLS

Flotation Bypass System Components

A Upstream / downstream isolation flange

The bypassed cell is safely isolated from the others by installing an isolation flange on the upstream and downstream dart valve openings.

B Multi-Sense® level sensor

Installed into the upstream cell, the sensor relays a signal to the pinch valve in the bypass line, regulating its position based on operator input of the manual level setpoint in the control panel.

C Modified manway hatch

The manway hatch cover is modified to allow connection of the bypass pipe to the upstream and downstream cells.

D Knife gate valve

A knife gate valve is located on the upstream end of the bypass line to aid in isolating the system, if necessary.

E Flexible expansion joints


Expansion joints in the piping system accommodate variations in distance between the cells as the system is moved up or down the bank.

F Piping segments

HDPE pipe segments are custom-sized for your circuit to accommodate your site's flow rate and floor plan.

G Pinch valve

Located on the downstream end of the bypass line, the pinch valve is connected to and regulated by the Multi-Sense® level sensor, which is installed in the upstream cell.

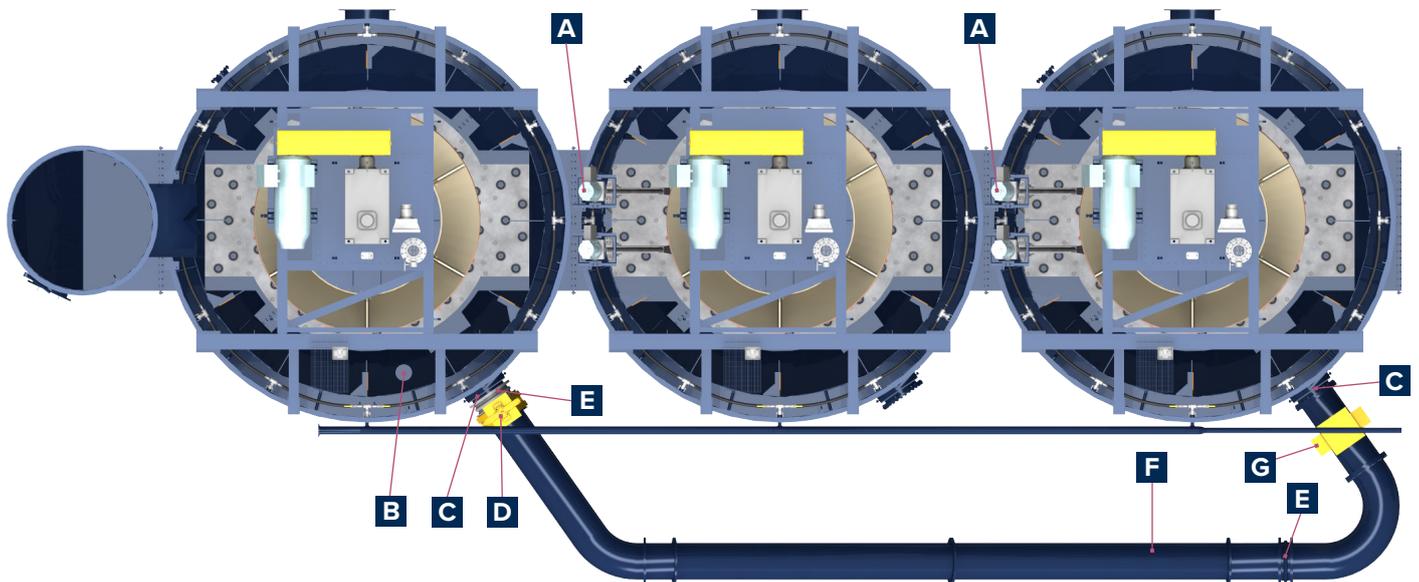

FLSmidth A/S
2500 Valby
Denmark
Tel. +45 3618 1000
info@flsmidth.com

www.flsmidth.com

FLSmidth Inc.
Salt Lake City Operations
Midvale, UT 84047
USA
Tel. +1 801 871 7000
info.sl.c@flsmidth.com

Copyright © 2023 FLSmidth A/S. All Rights Reserved. FLSmidth and FLS are (registered) trademarks of FLSmidth A/S. This brochure makes no offers, representations or warranties of any kind (express or implied), and information and data contained in this brochure are for general reference only and may change at any time. FLSmidth does not guarantee or make any representation regarding the use or the results of the information or the data provided in the brochure in terms of its correctness, accuracy, reliability or otherwise, and shall not be liable for any loss or damage of any kind incurred as a result of the use of the information or data provided in the brochure.